


Microfraise Z4 pour micro centres d'usinage

M3520

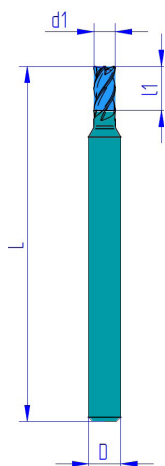

Matière

Acier < 700 N/mm²
Acier > 700 N/mm²
Acier inox
Fonte
Cuivre
Laiton - Bronze
Aluminium
Or - Argent
Platine - Palladium
Superaliages
Titane

Vc / Vc rev.

320 / 360
240 / 275
310 / 350
290 / 350
320 / 365
330 / 370
350 / 400
270 / 300
220 / 240
240 / 275
270 / 300

Brut

■
-
-
■
■
■
■
-
-
-
■

Revêtu

■
■
■
■
■
■
■
■
■
■
■

Rev.recomm.*

Tisi
Tisi
Tisi
Tisi
Solo
Solo
Solo
Solo
Solo
Tisi
MARC

Pas adapté -

Adapté

■ Très adapté

■

Tolérances

$d_1 \leq 1\text{mm} : 0/-0.01$
 $d_1 > 1\text{mm} : 0/-0.02$
 $d_1 = D : d_1 \cdot e8$

D: h5

raw or coated
brut ou revêtu
roh oder beschichtet
grezzo o rivestito



CARB

45°
0.01x45°

λ
38°

Z4



λ
10°



$ap = 0.1 \cdot d_1$



$ae = d_1 / 20$
 $ap = l_1$

Art. n°	d1	l1	D	L
M3520d0.50	0.50	1	3	28
M3520d0.70	0.70	1.4	3	28
M3520d1.00	1.00	2	3	28
M3520d1.50	1.50	3	3	28
M3520d2.00	2.00	4	3	28
M3520d2.50	2.50	5	3	28
M3520d3.00	3.00	6	3	28

Options
(voir page 000)



swiss made

2024

71